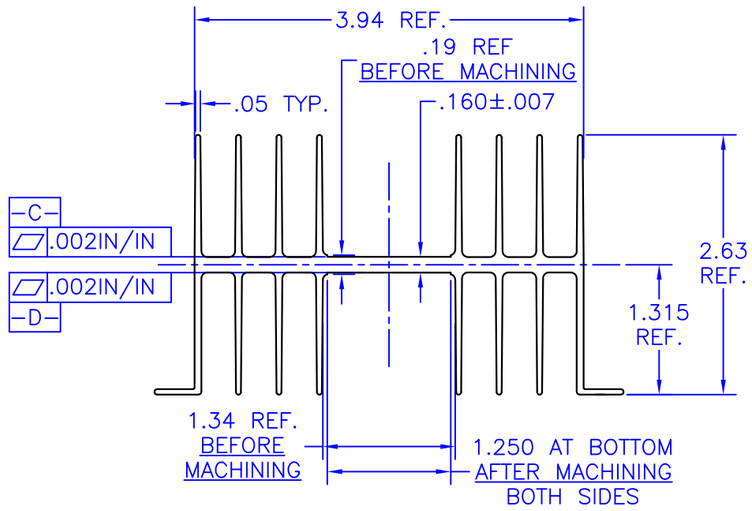

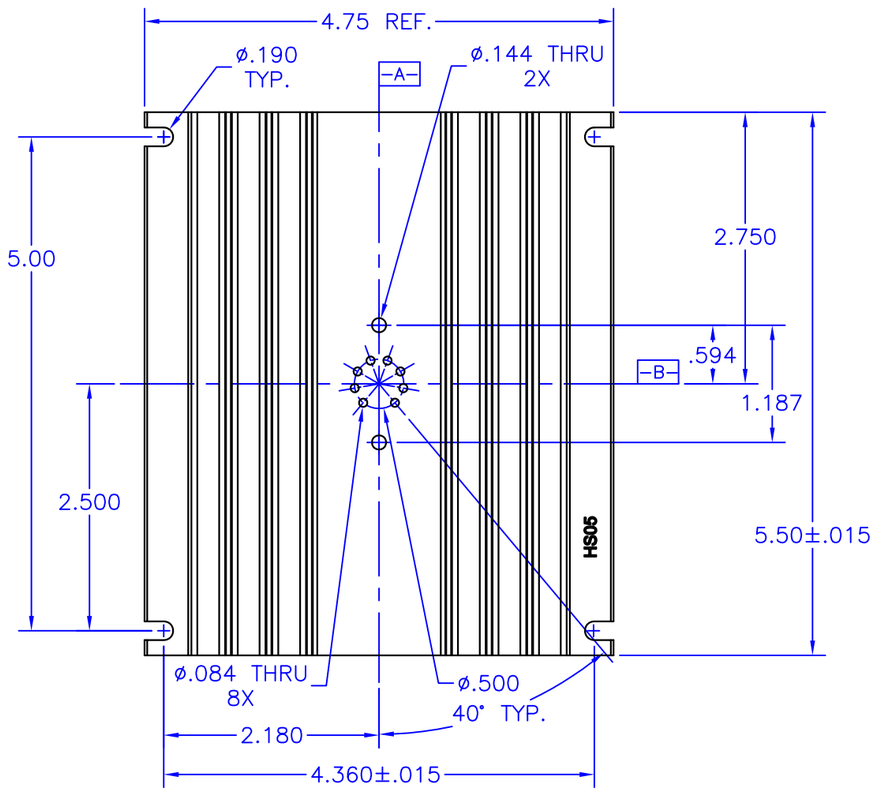

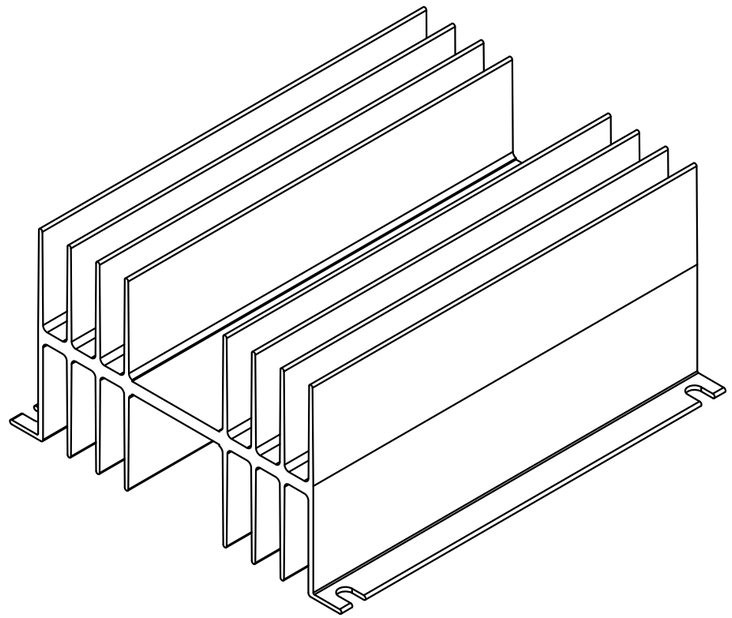



NOTES:

1. Unless otherwise noted, all dimensions are in inches.
2. Break all sharp edges, de-burr & remove loose chips.
3. Material: 6063-T5 aluminum (AAVID Thermalloy extrusion 60055)
4. Finish: Anodize per MIL-A-8625, Type II, Class 2, Black
   Typical breakdown voltage > 300V
5. Mark with contrasting ink as shown, if specified by P.O.
6. Approximate Weight: 16.3 oz [462g]
7. Thermal rating: 0.85 °C/W

TOLERANCES - UNLESS OTHERWISE SPECIFIED .XX = ±.01 [.254] .XXX = ±.005 [.127] ANG. = ±5°	APEX MICROTECHNOLOGY	TITLE: HEATSINK, TO-3					MODEL: HS05
		SUBJECT: MECHANICAL DRAWING					
		ENGINEER: D-M	DRAWN BY: RMOR	DCA: 13356	SH: 1 OF 1	FILENAME: HS05	REV: K / DATE: 14OCT13