
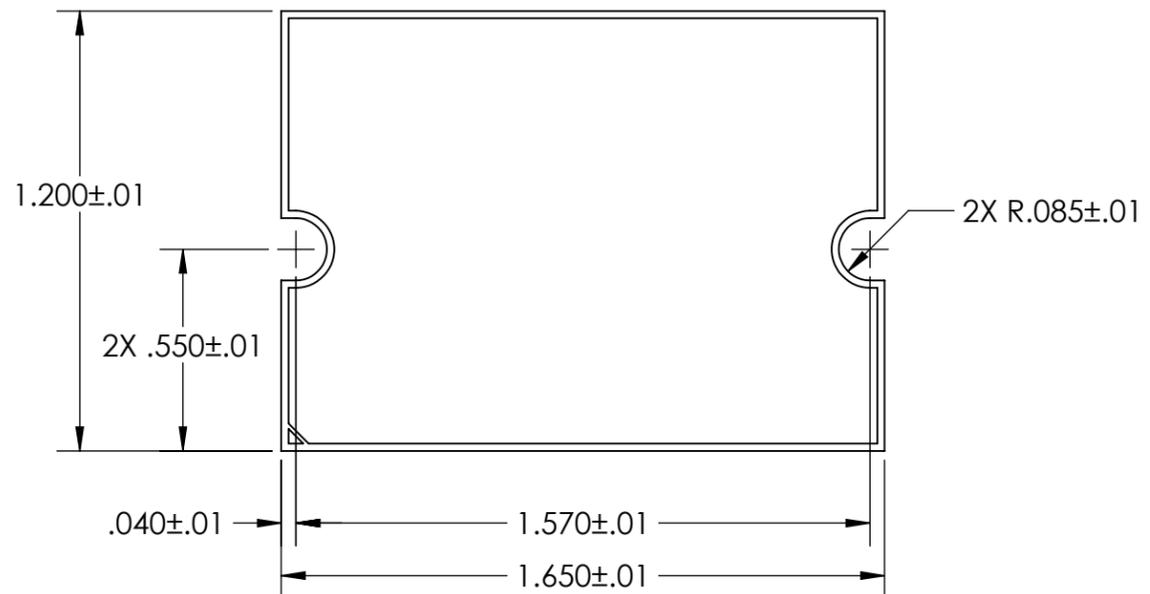
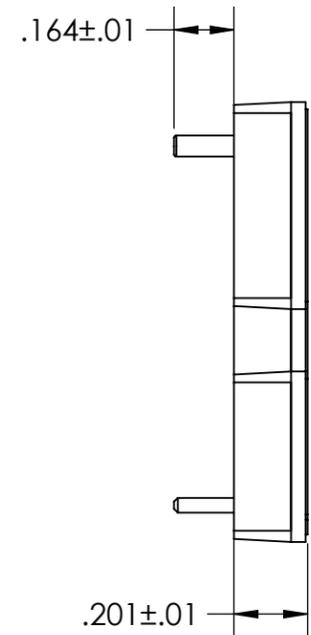


4

3

2

1

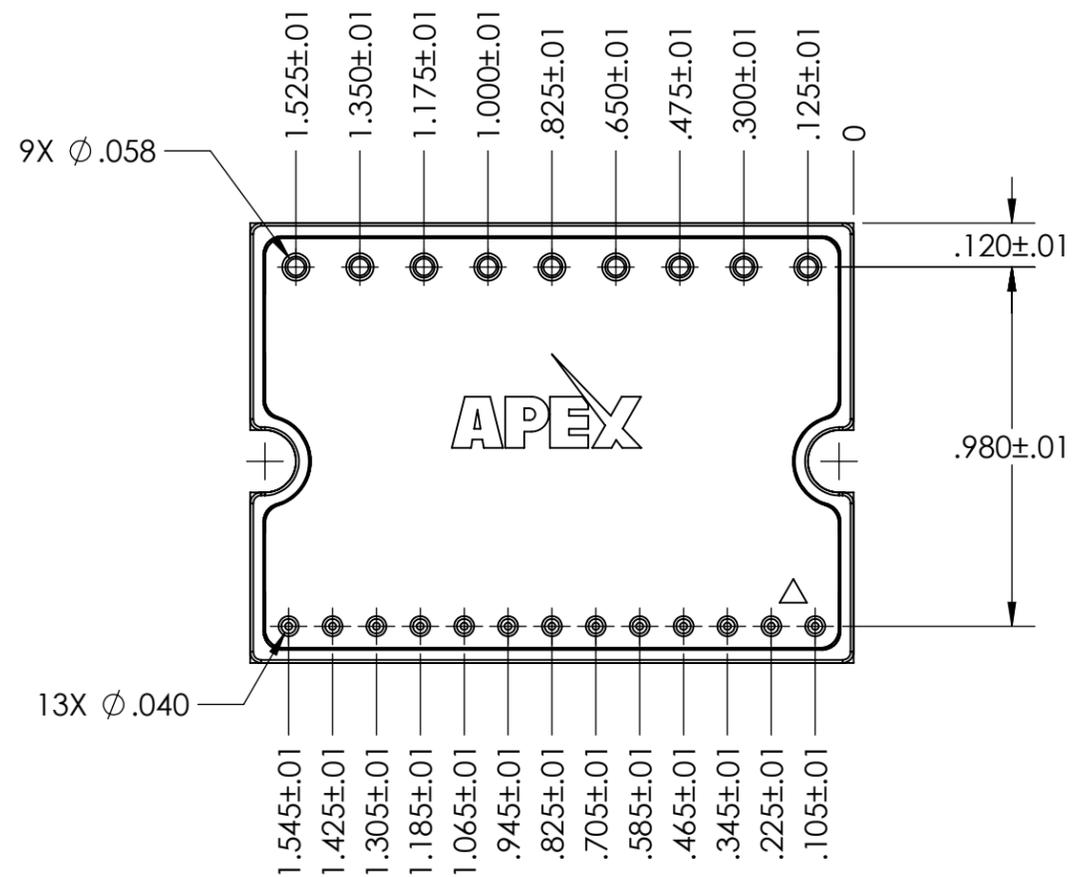

**NOTES:**

1. TRIANGLE ON LID DENOTES PIN 1.
2. LARGE PINS: COPPER CDA101 OR EQ.
3. SMALL PINS: BRASS ALLOY 360.
4. PIN COATING: 100-150 MICRO INCHES NICKEL PER ASTM B 689, TYPE 2.
5. EPOXY-SEALED NON-HERMETIC PACKAGE.

 <p><b>PROPRIETARY AND CONFIDENTIAL</b></p> <p>This document and all information contained herein is proprietary to Apex Microtechnology, Inc. and is not to be disclosed without the express written permission of Apex Microtechnology, Inc.</p>	UNLESS OTHERWISE SPECIFIED:	ENGINEER	JS	TITLE: <b>22-PIN (13+9) DIP, 1.65" X 1.2"</b>			
	DIMENSIONS ARE IN INCHES [MM] TOLERANCES:	DRAWN BY	JS				
	X.X ±.03 [.762] X.XX ±.01 [.254] X.XXX ±.005 [.127] ANGULAR ±1°	DCA	2026-1732		SIZE	DWG. NO.	REV
	SURFACE FINISH: 125 MICROINCHES [32µm] EDGE BREAK .005 - .020 [.127 - .508]	SEE NOTES		FINISH	<b>B</b>	<b>KU</b>	<b>A</b>
INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5-2018	DO NOT SCALE DRAWING	SHEET 1 OF 1		SCALE: 2:1	DATE: 3/3/2026		

4

3

2

1

B

B

A

A